


Standard Plus

Surface treatment: UV-Cured Polyurethane
Total thickness: 0.080" (2 mm)
Installation method: Glue-Down
Pattern: Unique Semi-Directional
FloorScore Certified
6' 6" Width (2m)
5-Year Warranty

Homogeneous Sheet *Stocking Program*

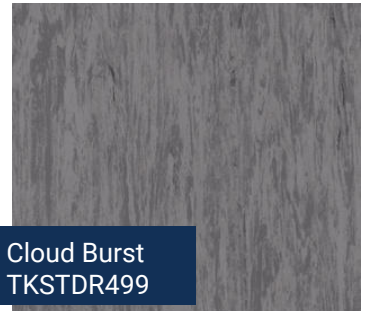

Performa

Surface treatment: Nitrogen Cured Polyurethane
Total thickness: 0.080" (2mm)
Wear layer thickness: 25 mil (0.64 mm)
Installation method: Glue-Down
Pattern: Wood, All-over Stone
FloorScore Certified
Certified Asthma & Allergy Friendly
10-Year Warranty

Heterogeneous Sheet *Stocking Program*

