





Oslo | Pewter
TK600012



Ozart | Greige
TK600312

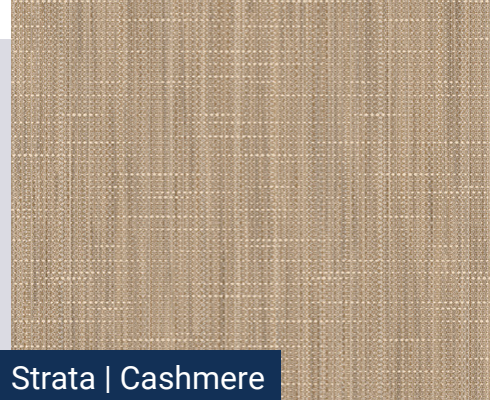

Strata | Cashmere
TK600712

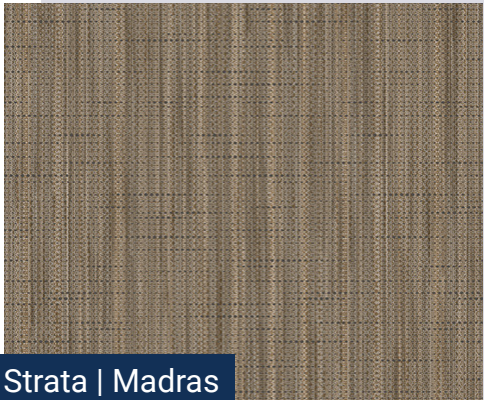

Strata | Madras
TK600722



Aria | Glacier
TK600812



Aria | Lunar
TK600822

Product Details

Width: 12'

Standard Roll Size: 100 sq.yd

Total Thickness: 0.080" (2.03 mm)

Wear Layer: 20 mil (0.5 mm)

Surface Treatment: Tectonic Polyurethane

Installation Method: Glue-Down or Loose-Lay

Warranty: Limited Lifetime Residential,
15 Yr Light Commercial

FloorScore Certified



Waterproof



Stain Resistant



Scratch & Dent
Resistant



Comfortable &
Quiet



Main Street
Commercial



Easy Installation



FloorScore
Certified



Asthma &
Allergy Friendly

Heat Welding
Approved

