




NFRCU0501  
Chauny Marble

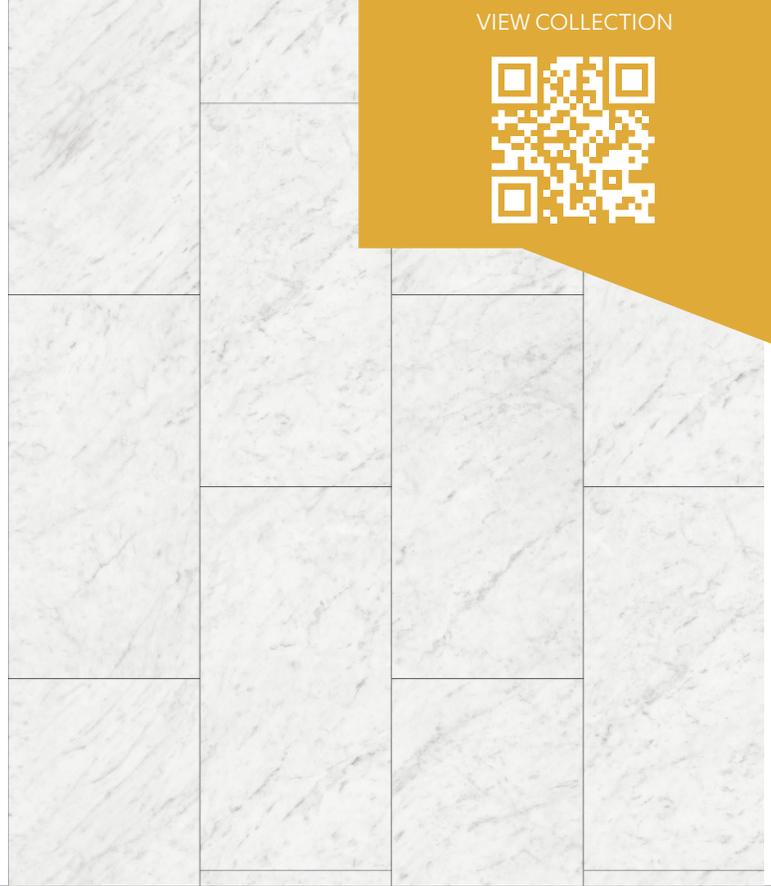

NFRCU0502  
Eden Carrara

### PALLADIUM SPECIFICATIONS

Construction	Waterproof Rigid Core
Dimensions	12" Wide x 24" Long, 300 mm x 600 mm
Overall Thickness	5.0 mm (included 1 mm pad)
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Installation	Angle/Angle
Packaging	22.06 sf/ctn - 60 carton/plt - 1324 sf/plt
Warranty	25 Yr Residential, 5 Yr Light Commercial 5 Yr Multi-Family

### INSTALLATION FAST FACTS

- Radiant Heat: Approved (Hydro Systems ONLY)
- Acclimate product to normal room conditions
- Relative Humidity: 35%-55%
- Recommended Room Temp: 60° F -85° F after install
- Expansion Space: 1/4" gap
- Transitions required for rooms larger than 50' W x 50' L

### COORDINATING TRIMS AVAILABLE

- T-Mold, Reducer, Quarter Round, End Cap, Stair Nose, QNose

Additional Specifications, Full Installation Instructions & Warranty Information Available Online [www.tasupply.com](http://www.tasupply.com)



### FEATURES & BENEFITS

- Dimensionally stable rigid core construction
- Premium IXPE attached pad reduces sound transfer and adds comfort underfoot
- Waterproof core technology protects against spills
- Polyurethane finish provides extra scratch resistance
- Simple locking system allows for easy installation

DISTRIBUTED BY

**T&A supply company, Inc.**